












BuzziPleat

The Family

		Models		
Lighting Units	Retrofit E27 (bulb excluded)	BuzziPleat Light Edel	BuzziPleat Light Edel Long	BuzziPleat Light Ripple
				
	LED Solo Globe			
	LED Solo Spot			
	LED Trio Globe			
	LED Trio Spot			
	LED Quintet Globe			
	LED Quintet Spot			

Lighting Data

Lighting Units


Retrofit Lighting unit



BuzziSol Solo retrofit includes 1 x E27 fitting. (max.40W)
BuzziSol Trio retrofit includes 3 x E27 fitting. (max.60W)
Bulb Excluded

LED


Globe



BuzziSol is a LED fixture consisting of 1 (BuzziProp Small) or 3 (BuzziProp Beam) powder-coated black heatsink with LED chip on board (COB) light source(s).

The product can be finished with a frosted glass globe diffuser which spreads the light in a large beam angle of 170°, enlighting the surroundings or a reflector spot adaptor directing the light with a beam angle of 38° downwards.

Spot



BuzziPleat Light

Model: Edel | Ripple
Medium | Large

Lighting Options		Characteristics		Mounting
Lighting Unit	Voltage Input	Technical	Visual	Options
Retrofit Solo	220-240V	Wattage: Max. 40W	Color: Power Cable: Black Ceiling Canopy: Black	

Lighting Options					Characteristics		Mounting
Lighting Unit	Voltage Input	Color Temperature	UGR (Diffuser type)	Dimming	Technical	Visual	Options
LED Solo	220-240V	2700K 3000K 4000K	23 (Globe)	1-10V DALI	Power consumption: 20W Light output: 1500 Lm Efficacy: 75 Lm/W CRI: > 90	Color: Power Cable: Black Ceiling Canopy: Black	
			12 (Spot)	1-10V DALI	Power consumption: 20W Light output: 1500 Lm Efficacy: 75 Lm/W CRI: >w 90		

Model: Light Edel Long Medium

Lighting Options		Characteristics		Mounting
Lighting Unit	Voltage Input	Technical	Visual	Options
Retrofit Trio	220 - 240V	Wattage: 3 x Max. 60W	Color: Power Cable: Black Ceiling Canopy: Black	2 cables of 2 m or 5 m Alu or Black

Lighting Options			Characteristics				Mounting
Lighting Unit	Voltage Input	Color Temperature	UGR (Diffuser type)	Dimming	Technical	Visual	Options
LED Trio	220 - 240V	2700K 3000K 4000K	23 (Globe)	1-10V DALI	Power consumption: 60W Light output: 3 x1500 Lm Efficacy: 92 Lm/W CRI: > 90	Color: Power Cable: Black Ceiling Canopy: Black	2 cables of 2 m or 5 m Alu or Black
			12 (Spot)	1-10V DALI	Power consumption: 60W Light output: 3 x1500 Lm Efficacy: 92 Lm/W CRI: > 90		

Model: Light Edel Long Medium

Lighting Options

Characteristics

Mounting

Lighting Unit	Voltage Input	Color Temperature	UGR (Diffuser type)	Dimming	Technical	Visual	Options
LED Quintet	220 - 240V	2700K 3000K 4000K	23 (Globe)	1-10V DALI	Power consumption: 90W Light output: 5 x 1500 Lm Efficacy: 92 Lm/W CRI: > 90	Color: Power Cable: Black Ceiling Canopy: Black	2 cables of 2 m or 5 m Alu or Black
			12 (Spot)	1-10V DALI	Power consumption: 90W Light output: 5 x 1500 Lm Efficacy: 92 Lm/W CRI: > 90		



CE CB

Photometric Data

BuzziPleat Light BuzziSol Solo

LED Solo Globe Cartesian diagram **LED Solo Globe Polar curve**

LED Solo Globe Cartesian diagram **LED Solo Globe Polar curve**

LED Solo Spot Cartesian diagram **LED Solo Spot Polar curve**

LED Solo Spot Cartesian diagram **LED Solo Spot Polar curve**

BuzziPleat Light BuzziSol Trio

LED Trio Globe Cartesian diagram **LED Trio Globe Polar curve**

LED Trio Globe Cartesian diagram **LED Trio Globe Polar curve**

LED Trio Spot Cartesian diagram **LED Trio Spot Polar curve**

LED Trio Spot Cartesian diagram **LED Trio Spot Polar curve**

BuzziPleat Light BuzziSol Quintet

LED Quintet Globe Cartesian diagram LED Quintet Globe Polar curve

LED Quintet Globe Cartesian diagram LED Quintet Globe Polar curve

LED Quintet Spot Cartesian diagram **LED Quintet Spot Polar curve**

LED Quintet Spot Cartesian diagram **LED Quintet Spot Polar curve**


Tips and Tricks - Light Options

To enlight your workplace with optimal lux levels take following measurements into account:

BuzziPleat Light BuzziSol Solo


Solo Spot

Office,
Meeting room



Solo Globe


Office,
Meeting room



BuzziPleat Light BuzziSol Trio


Trio Spot

Office,
Meeting room



Trio Globe


Office,
Meeting room



BuzziPleat Light BuzziSol Quintet


Quintet Spot

Office
Meeting room



Quintet Globe

Office,
Meeting room




* According to EN12464

Product Data

Fixing System

Fixing System Acoustic Panel

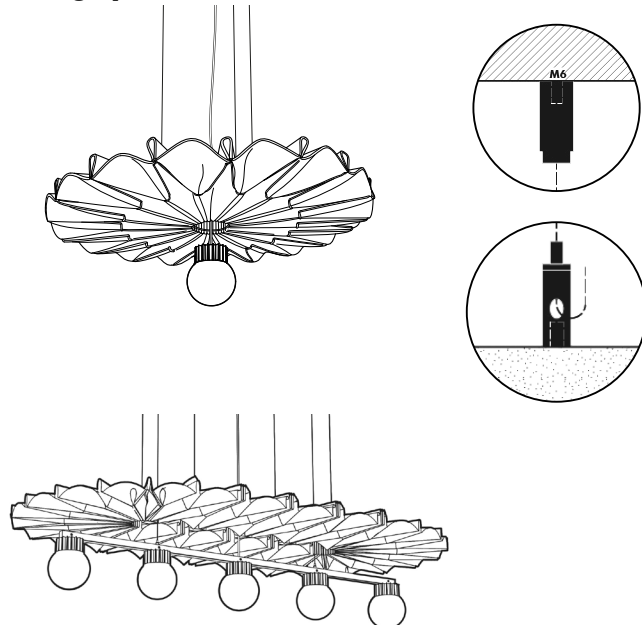

BuzziPleat Light Edel and Ripple are suspended on 3 cables of 2 or 5 m black or alu colored cables, with fixing system screw.

BuzziPleat Light Edel Long is suspended on 4 cables of 2 or 5 m black or alu colored cables, with fixing system screw.

Fixing System Lighting

The light element of BuzziPleat Light Edel Long is suspended independently from the acoustic panel with 2 cables of 2 – 5 m black or alu colored cables, with fixing system screw.

▲ If installing on suspended ceiling, verify load capacity prior to installation.
Ensure a min distance of 10 cm between the felt shade and the LED luminaire.

Acoustic Panel



The acoustic panel consists of one layer of BuzziFelt, with an OffWhite or Black lace.

The lightweight sculptural shade is created by pleating or smocking sound absorbing BuzziFelt.

The architectural folds maximize surface area, delivering exceptional acoustic performance.



Absorption



Diffusion



Mid tone




High tone

Optional: an extra layer of BuzziFabric can be added on 1 side (only in combination with OffWhite or Anthracite Felt).

Acoustics Data

BuzziPleat Ceiling Suspended


Equivalent sound absorption area in m² per object

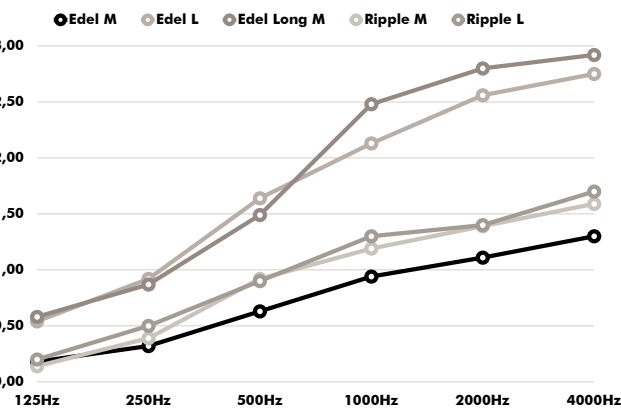


Hz	Edel M Aeq/m²	Edel L Aeq/m²	Edel Long M Aeq/m²	Ripple M Aeq/m²	Ripple L Aeq/m²
125	0.18	0.54	0.58	0.14	0.20
250	0.32	0.92	0.87	0.39	0.50
500	0.63	1.64	1.49	0.92	0.90
1000	0.94	2.13	2.48	1.19	1.30
2000	1.11	2.56	2.80	1.39	1.40
4000	1.30	2.75	2.92	1.59	1.70

Dimensions

BuzziPleat Light Ripple LED

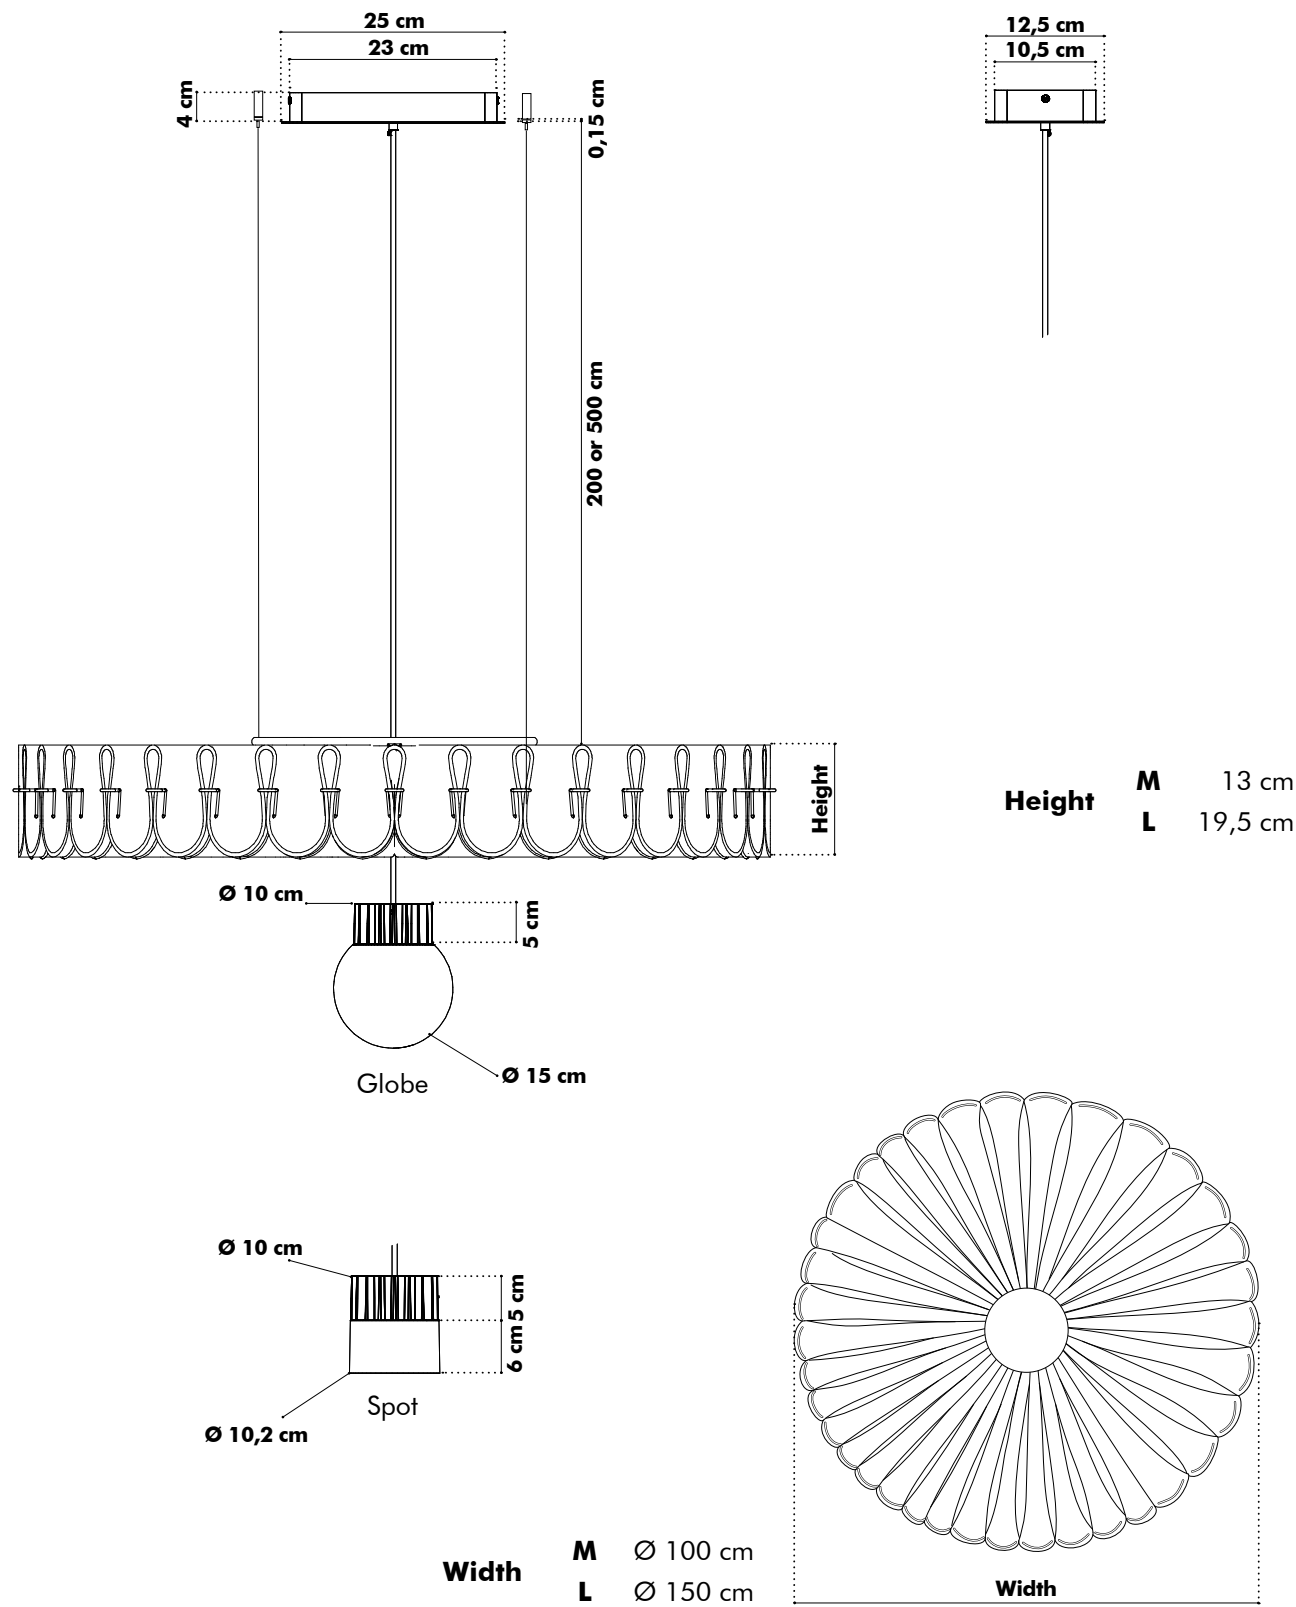


BuzziPleat Light Ripple Retrofit

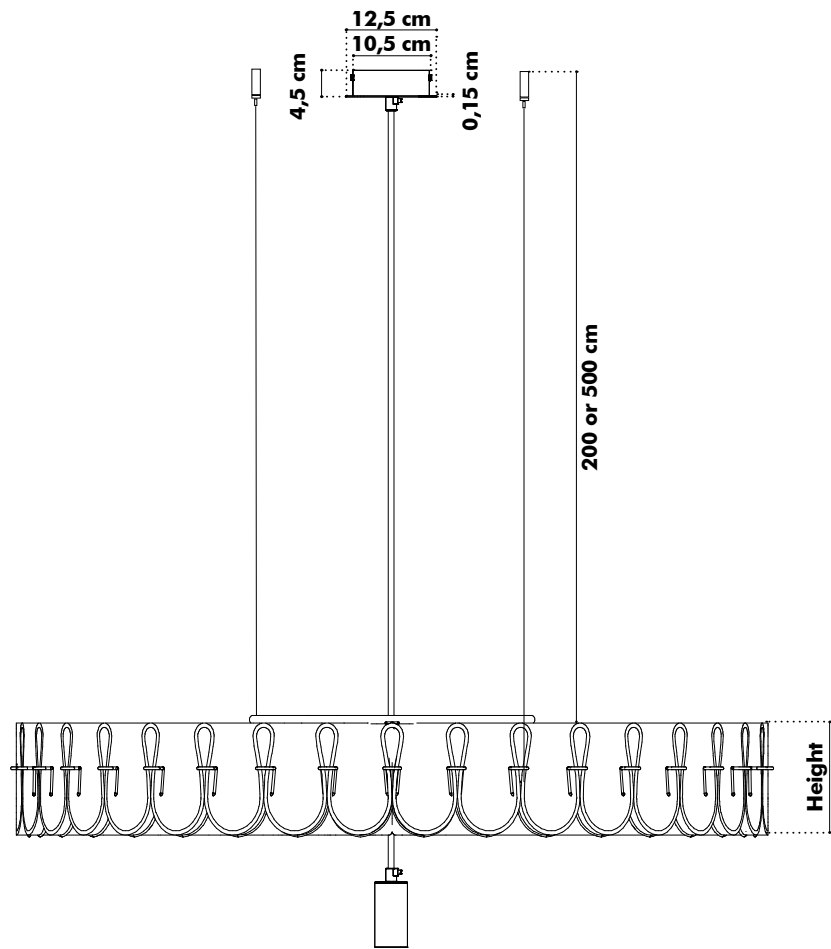


Height	M	13 cm
	L	19,5 cm


Width	M	Ø 100 cm
	L	Ø 150 cm

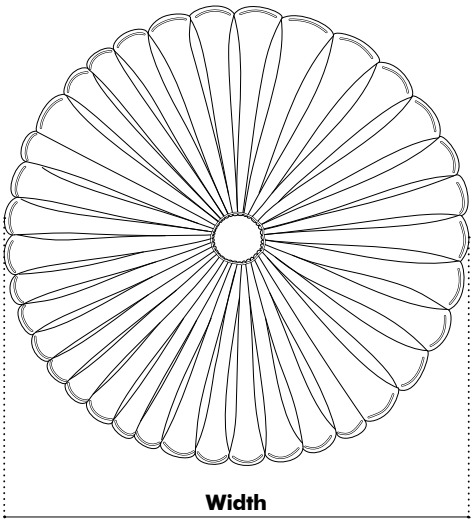

BuzziPleat Light Edel LED

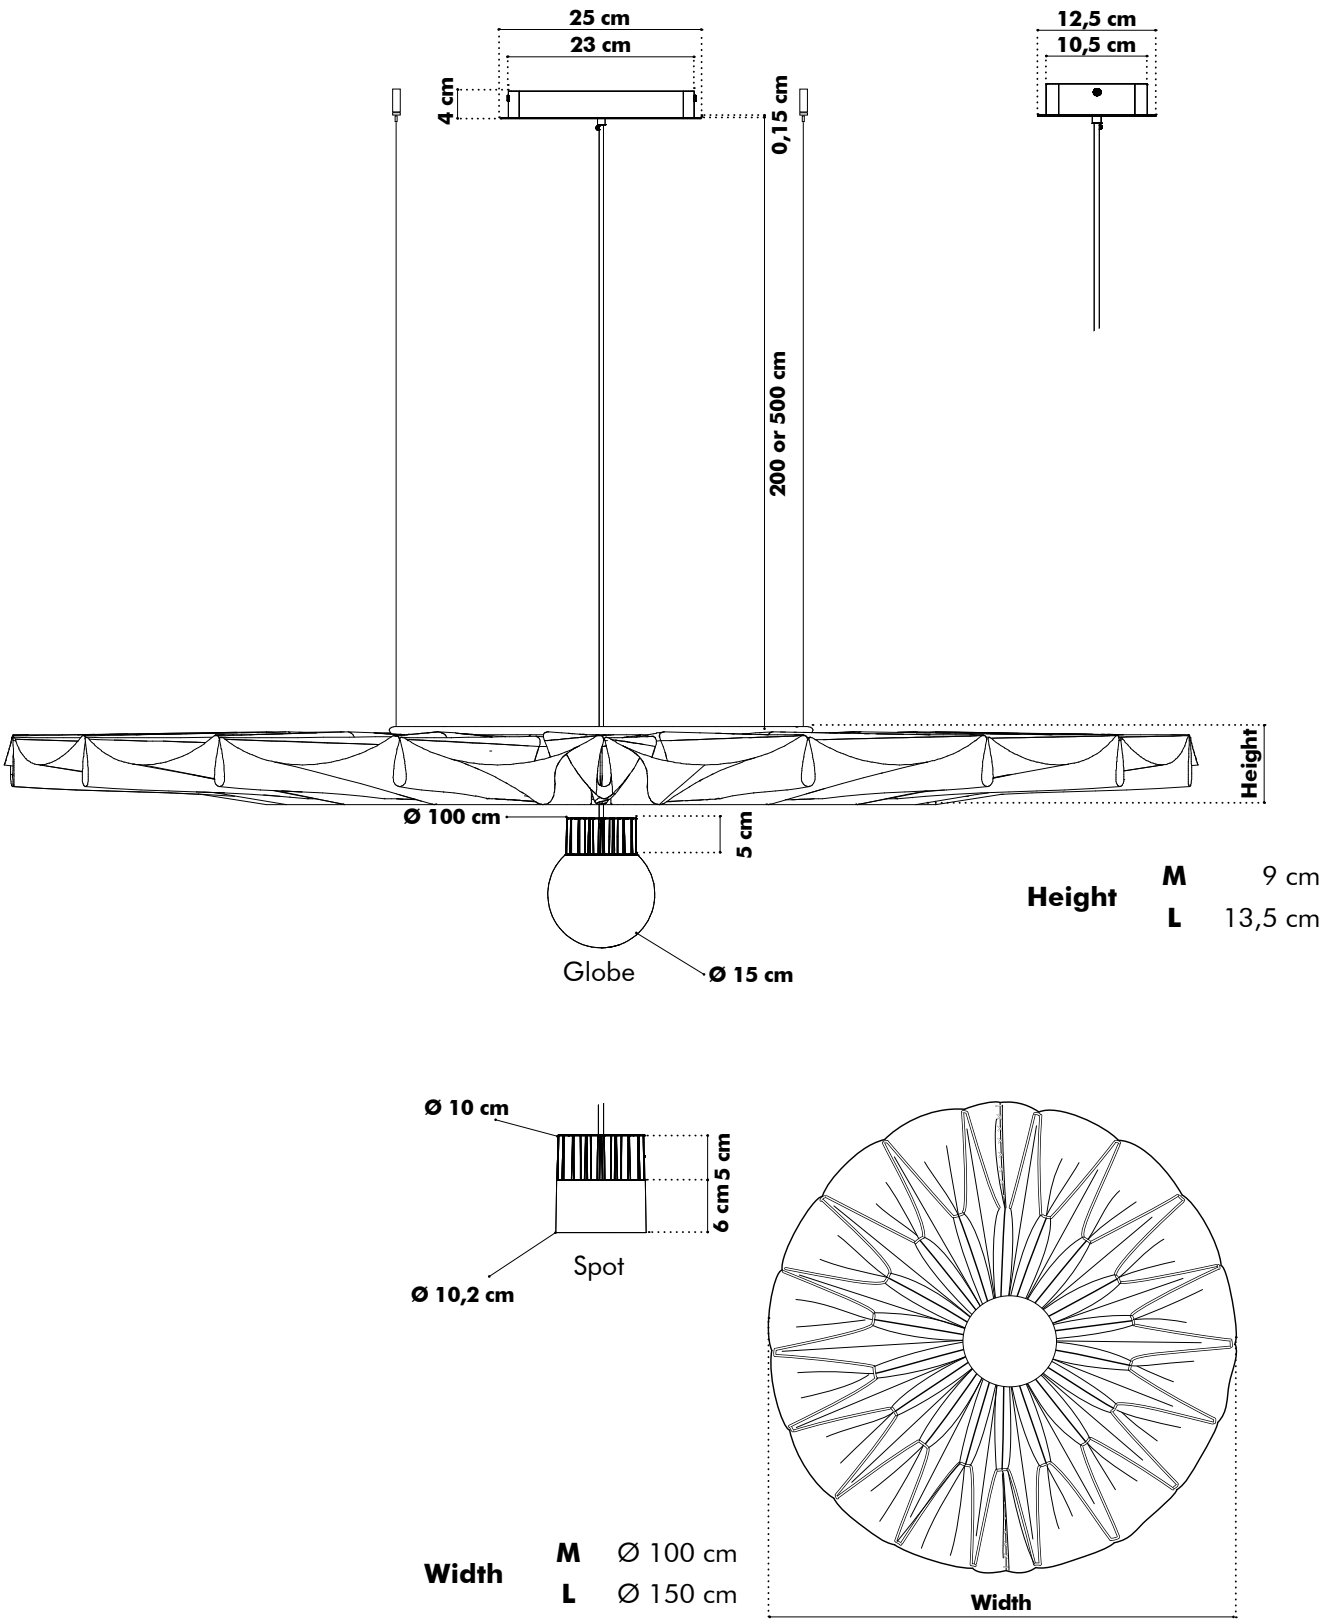


BuzziPleat Light Edel Retrofit


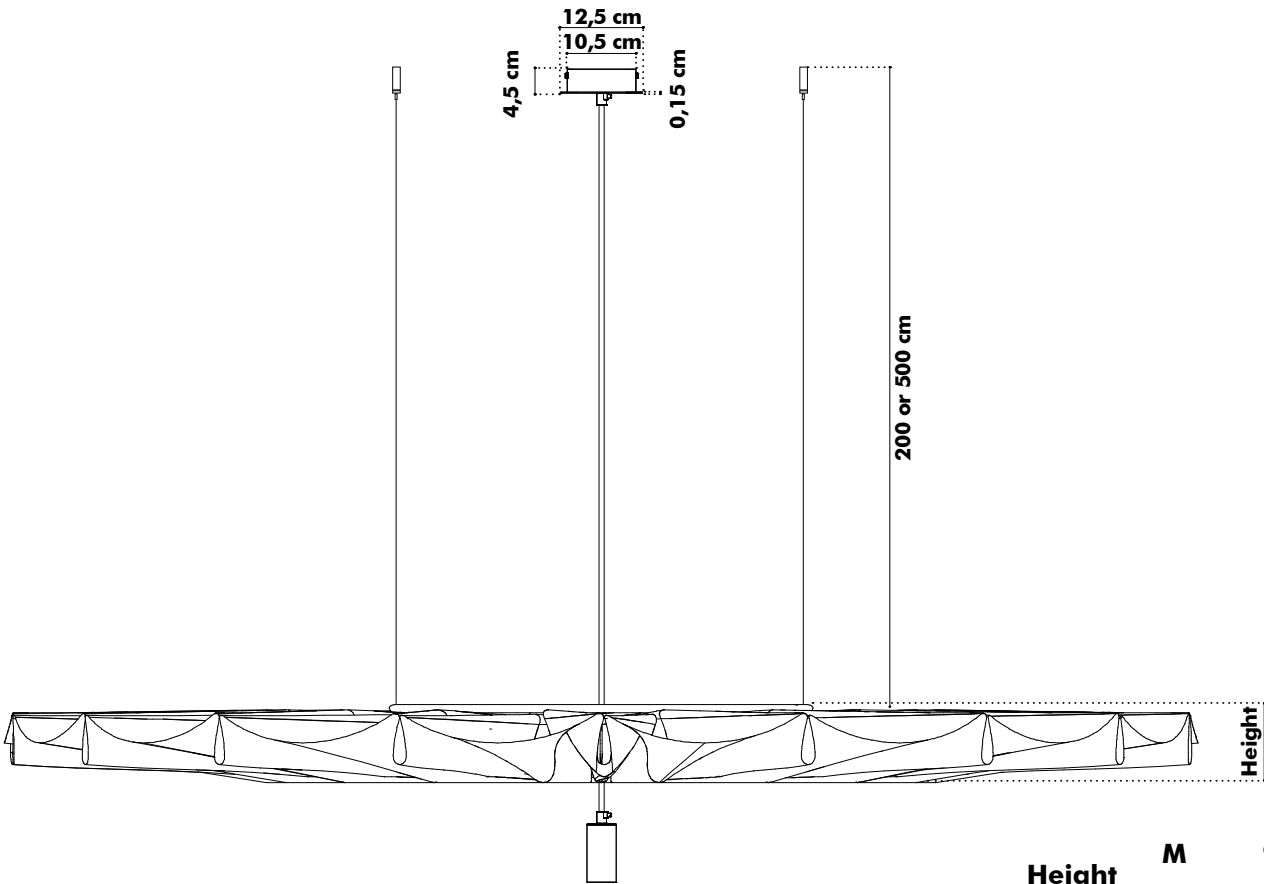


Height	M	9 cm
	L	13,5 cm



Width	M	Ø 100 cm
	L	Ø 150 cm

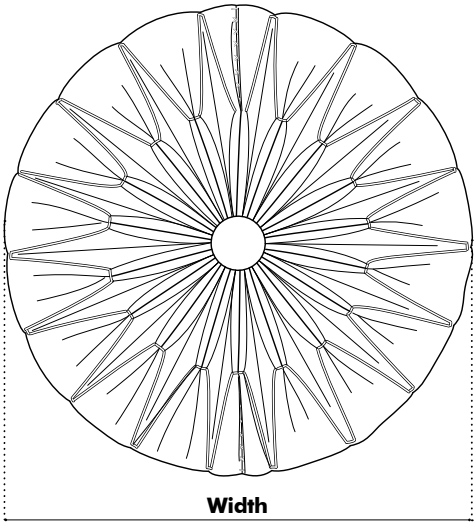


BuzziPleat Light Edel Long Trio LED

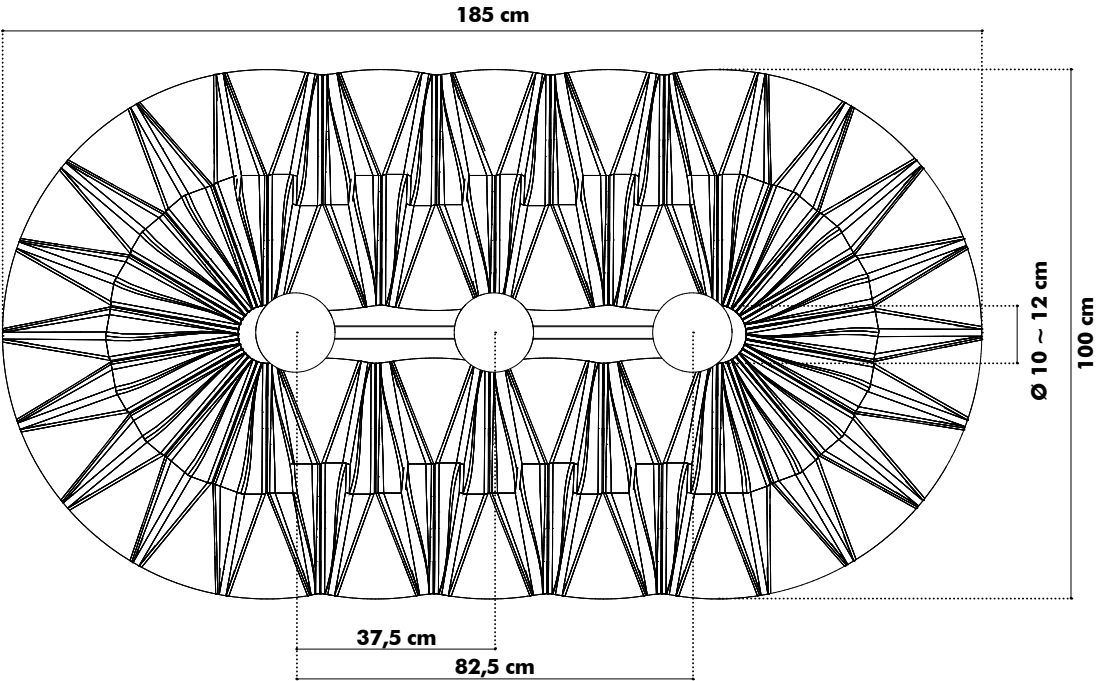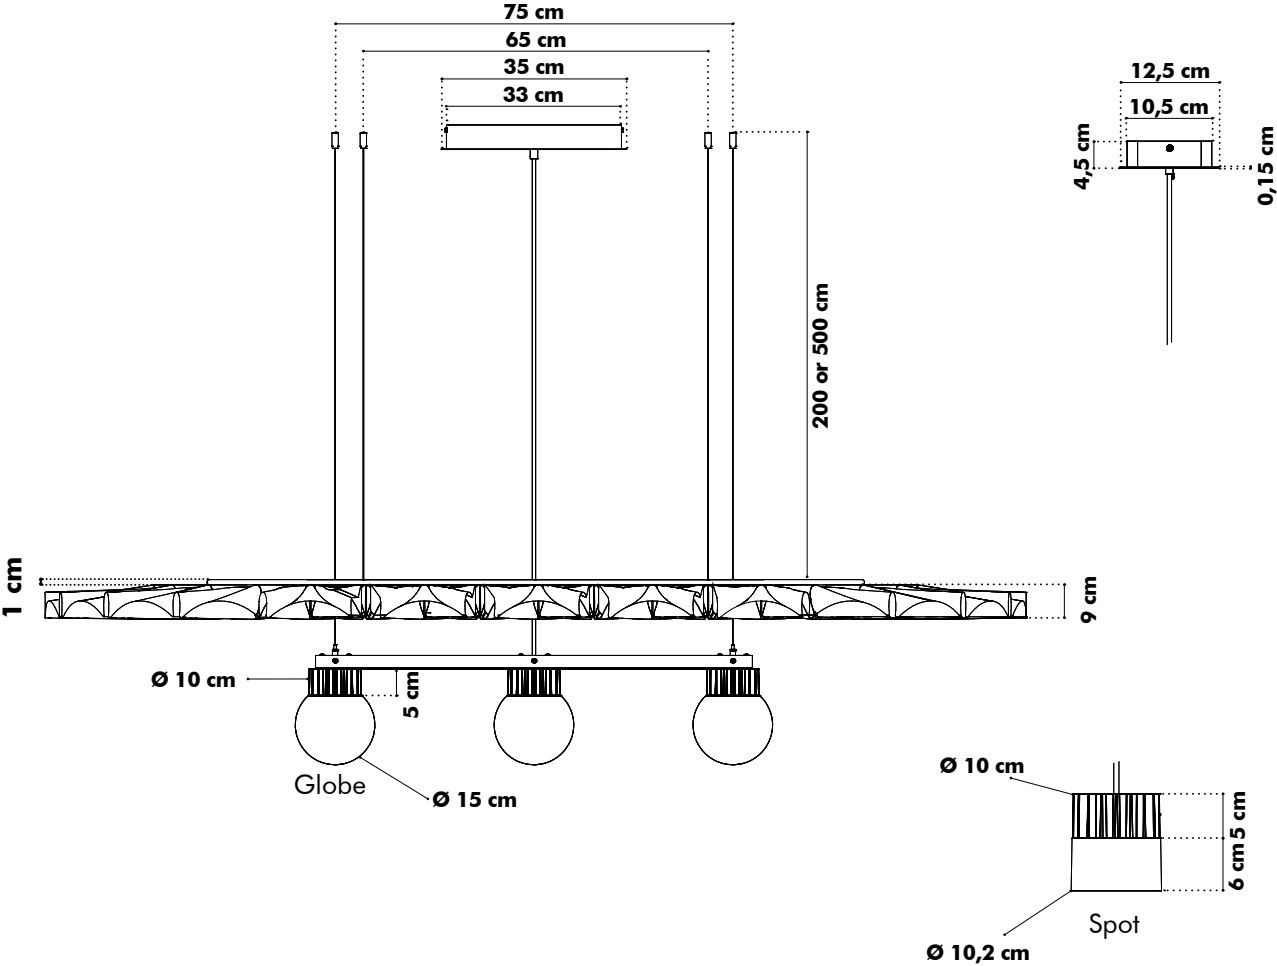

BuzziPleat Light Edel Long Trio Retrofit

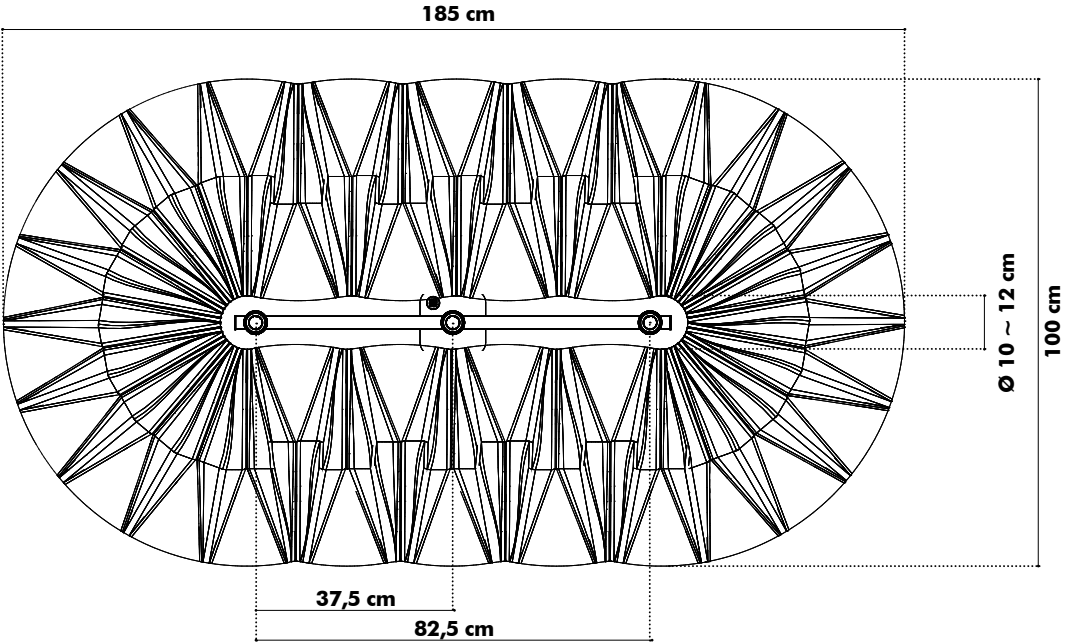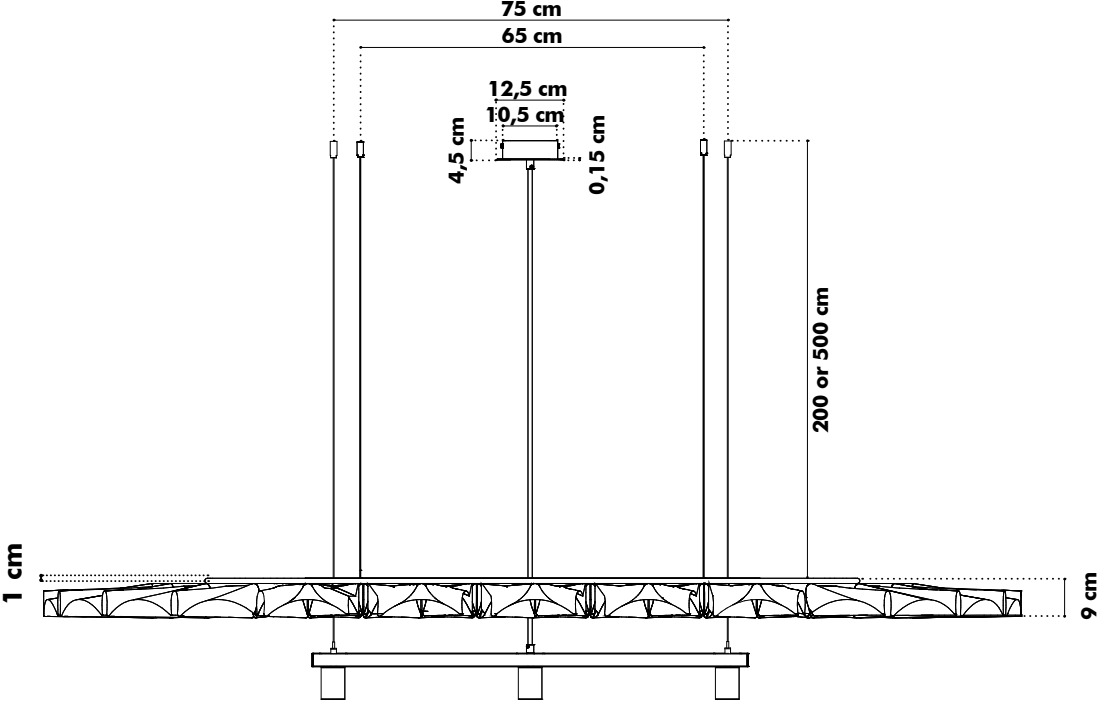


BuzziPleat Light Edel Long Quintet

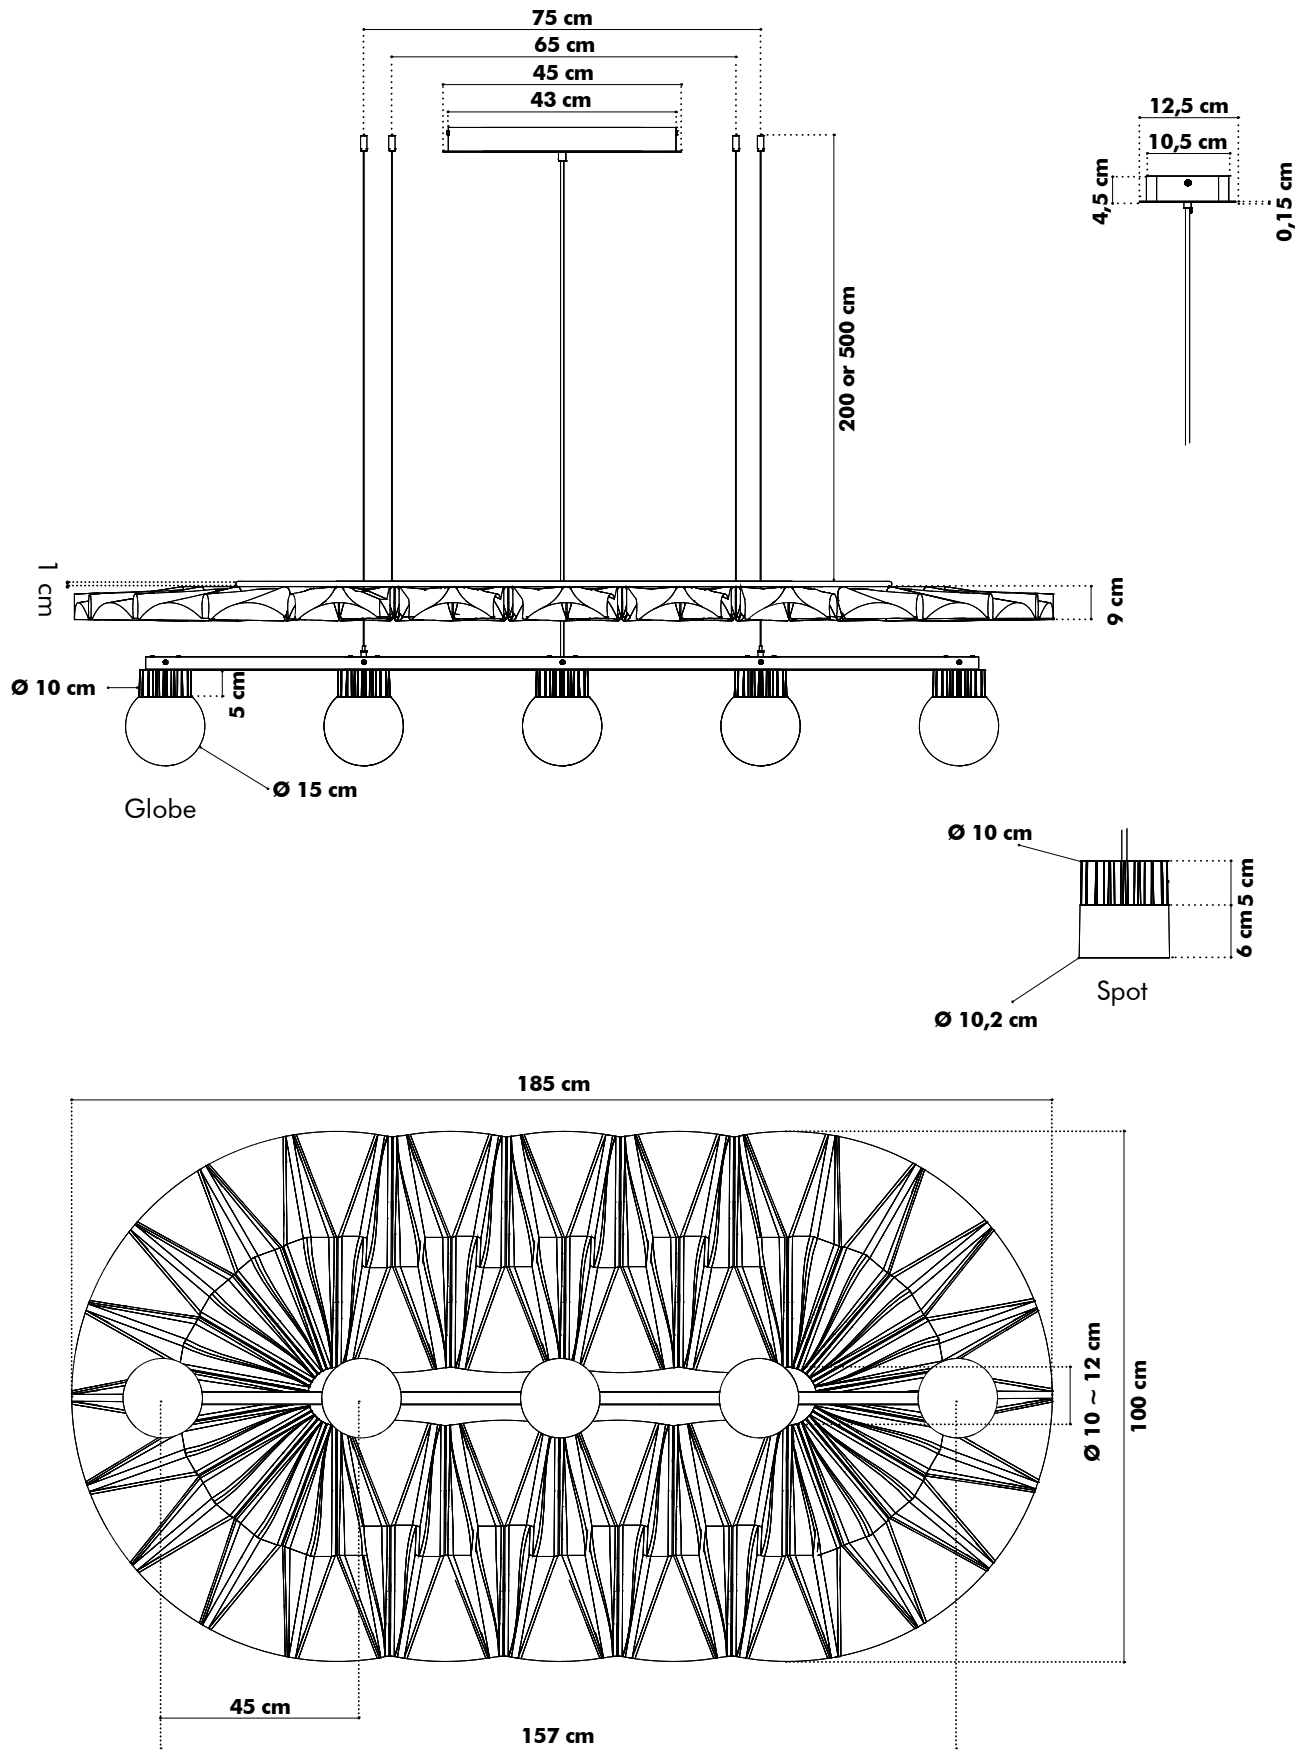


Weights

BuzziPleat Light Ripple Medium | Large BuzziSol Solo Retrofit

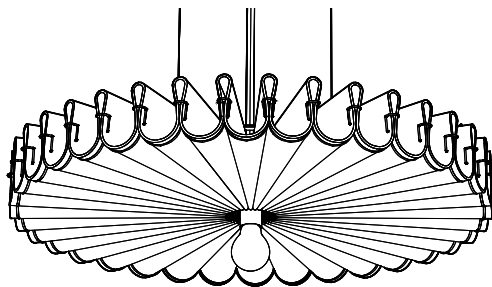


⚖ Medium: 6.3 kg
Large: 12 kg

BuzziPleat Light Ripple Medium | Large BuzziSol Solo LED

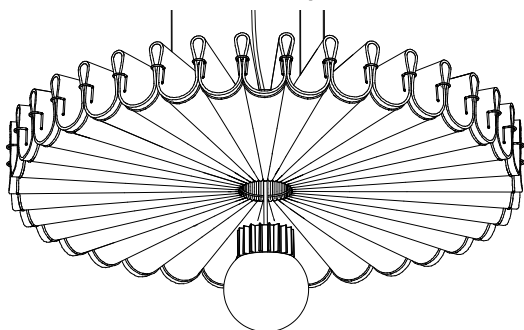


⚖ Medium: 6,7 kg
Large: 12,4 kg

BuzzuPleat Light Edel Medium | Large BuzziSol Solo Retrofit

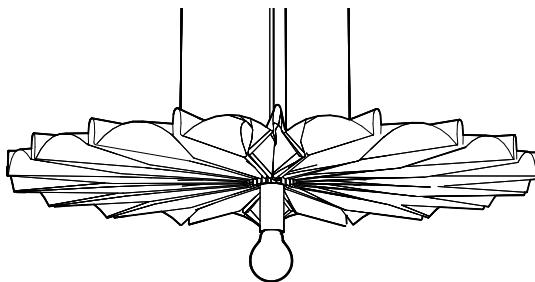


⚖ Medium: 5,3 kg
Large: 10 kg

BuzzuPleat Light Edel Medium | Large BuzziSol Solo LED

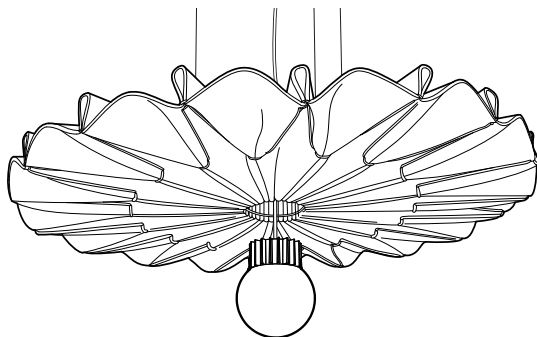


⚖ Medium: 5,7 kg
Large: 10,4 kg

BuzziPleat Light Edel Long Trio BuzziSol Trio Retrofit

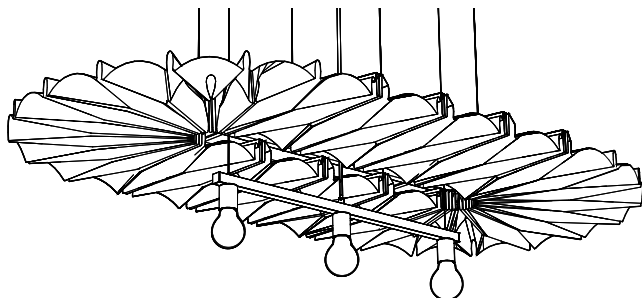


 11.6 kg

BuzziPleat Light Edel Long Trio BuzziSol Trio LED

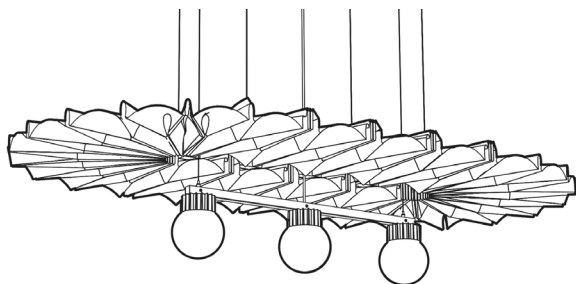

 14 kg

BuzziPleat Light Edel Long Quintet BuzziSol Quintet LED

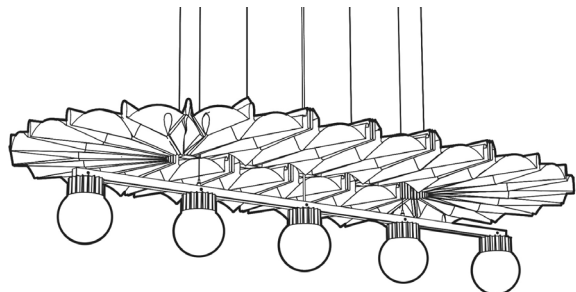

 16,5 kg


Fabrics

Felt


Composition 100% Recycled P.E.T. Felt, latex backing
Weight 1.000 g/m² | 29.49 oz/yd²
Abrasion resistance >7.000 Martindale
Flammability EU: EN 13501.1 + A1/2009 Class B-s1,d0
USA: ASTM E84 Class A certified
Fastness to light USA 5



FE-OffWhite 63*




FE-StoneGrey 67



FE-Anthracite 68*

*Extra layer BuzziFabric Possible

Fabric (45 colors)




Category A
Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics
Weight 405 g/m² | 11.94 oz/yd²
Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek
Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A
Fastness to light EU: 4 | USA 4
Fastness to rubbing EU: Wet 3-4 | Dry 4-5
Fastness to crocking USA: Wet 5 | Dry 5



Acoustics

BuzziPleat Ceiling


Equivalent sound absorption area in m² per object

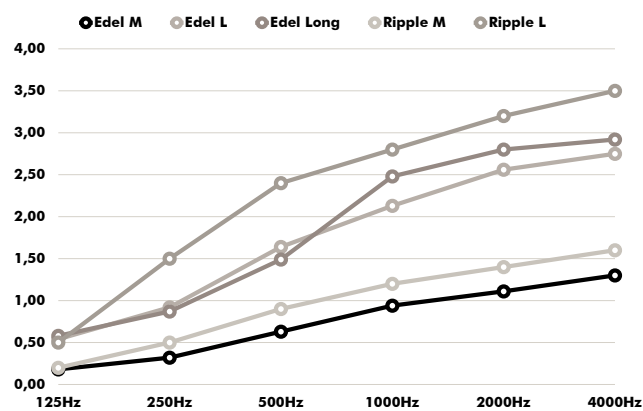

Hz	Edel M Aeq/m²	Edel L Aeq/m²	Edel Long M Aeq/m²	Ripple M Aeq/m²	Ripple L Aeq/m²
125	0.18	0.54	0.58	0.20	0.50
250	0.32	0.92	0.87	0.50	1.50
500	0.63	1.64	1.49	0.90	2.40
1000	0.94	2.13	2.48	1.20	2.80
2000	1.11	2.56	2.80	1.40	3.20
4000	1.30	2.75	2.92	1.60	3.50

epOXIA

6 avenue Charles de Gaulle
78150 Le Chesnay
+33 1 39 66 00 77
contact@epoxia.com
www.epoxia.com



Rejoignez-nous sur nos réseaux sociaux

