


Nevada



40020



40007



40011



40014




40016




40024




40030



40032




40038




40040




40042




40045




40050



40053



40060



40061

Technical specifications


COMPOSITION	100% PES FR	ASSESSMENT OF IGNITABILITY (CONTINUED)	
WIDTH	175	EN 1021 PART 1 / 2	PASS
LINEAR WEIGHT	840 GR/ML + 5%	UNI 9175 IM CLASE 3.IM	PASS
SEAM SLIPPAGE RESISTANCE (EN ISO 13936/2)	WARP 1,70 / WEFT 2,50	CAL TB 117:2013	PASS
ABRASION RESISTANCE		NFPA 260:2013	PASS
END POINT (A) FULLY WORN OFF (B) (EN ISO 12947/2)	50.000 (B)	IMO FTB 2010 PART 8 A 652 (16)	PASS
CHANGE ASPECT 3000C (EN ISO 12947/4)	3-4	LIGHTFASTNESS (EN ISO 105-B02)	6-7
PILLING RESISTANCE (EN ISO 12945/2)	4-5	COLOUR FASTNESS TO RUBBING (EN ISO 105-X12)	DRY 5 / WET 4-5
ASSESSMENT OF IGNITABILITY		DIMENSIONAL CHANGE IN DOMESTIC WASHING AND DRYING	
BS5852 SCHE. PART 4 SOURCE 0 / 1	PASS	(EN ISO 3759 / EN ISO 6330 / EN ISO 5077)	WARP -3% / WEFT -1,50%
BS7176 LOW HAZARD	PASS		




Mizmaze




0122




0212




0252




0322




0342




0392




0562




0682




0712



0762



0882



0962

Uniform Mélange



0453



0103



0123



0133



0153



0163



0183



0193




0263




0283



0293



0333



0353




0363




0413




0433




0463



0553



0583



0593



0623



0633



0653



0663



0683




0723




0753



0763




0793




0813



0833



0883




0913




0933




0963



0983




0993




0563

Plecto

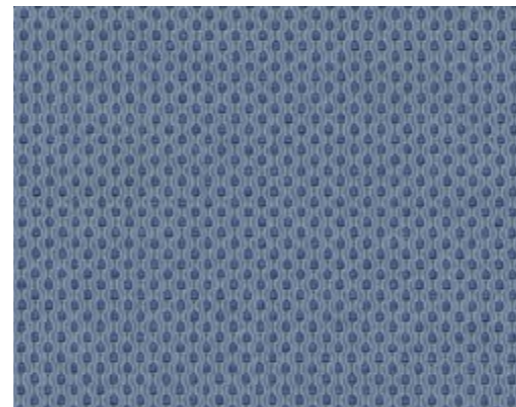


0734




0114



0134




0184




0224



0244




0284



0444




0564




0624




0654



0684



0784




0794



0874




0934




0984


Planum

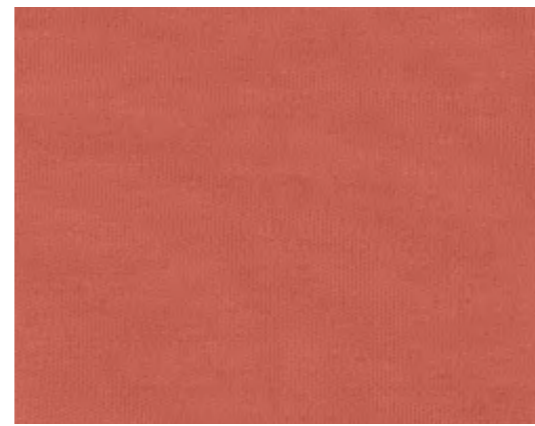


0521



0111



0141




0201



0241



0271




0351




0411




0441




0551




0571




0681




0711



0741




0751



0791



0921



0941




0961



0971

Drop

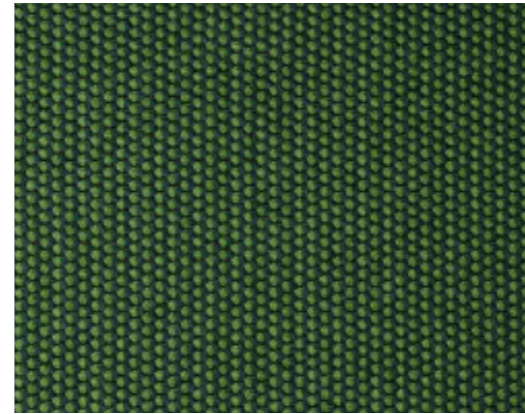

0961




0101



0121




0151



0191




0221



0261



0291




0421



0441




0461




0621




0641




0651



0661



0671



0691



0721




0751



0761




0771




0791




0851




0871




0891




0921



0951



0971



0991

epOXIA

6 avenue Charles de Gaulle
78150 Le Chesnay
+33 1 39 66 00 77
contact@epoxia.com
www.epoxia.com



Rejoignez-nous sur nos réseaux sociaux

